


Technical drawing of a mechanical assembly, likely a pump or motor unit, showing a side view. The drawing includes a horizontal base with a flange on the left and a vertical support structure on the right. A dimension line indicates a total length of 2130 units. Another dimension line indicates a distance of 1412 units from the right edge of the base to the center of the vertical support structure. The vertical support structure features a central vertical pipe or shaft with a flange at the top. The base is supported by four mounting feet. The drawing is a black and white line drawing with dashed lines indicating hidden internal features.

A technical drawing of a bolted joint assembly. The drawing shows a cross-section of a base plate (hatched) with a vertical bolt passing through it. The bolt has a hexagonal head and a threaded shank. A nut is threaded onto the shank. A washer is placed between the nut and the base plate. A second washer is placed between the bolt head and the base plate. A third washer is placed between the nut and a second base plate (hatched). A fourth washer is placed between the bolt head and a second base plate (hatched). The callouts are: 4 points to the first washer, 5 points to the second washer, 6 points to the third washer, 7 points to the fourth washer, and 8 points to the bolt head.

Technical drawing of a mechanical assembly. The main view is a cross-section of a shaft with a pulley and a bracket. The shaft is shown with a section line 'A-A' and a detailed view of the bracket showing four screws. The drawing includes a section line 'A-A' and a detailed view of the bracket showing four screws.

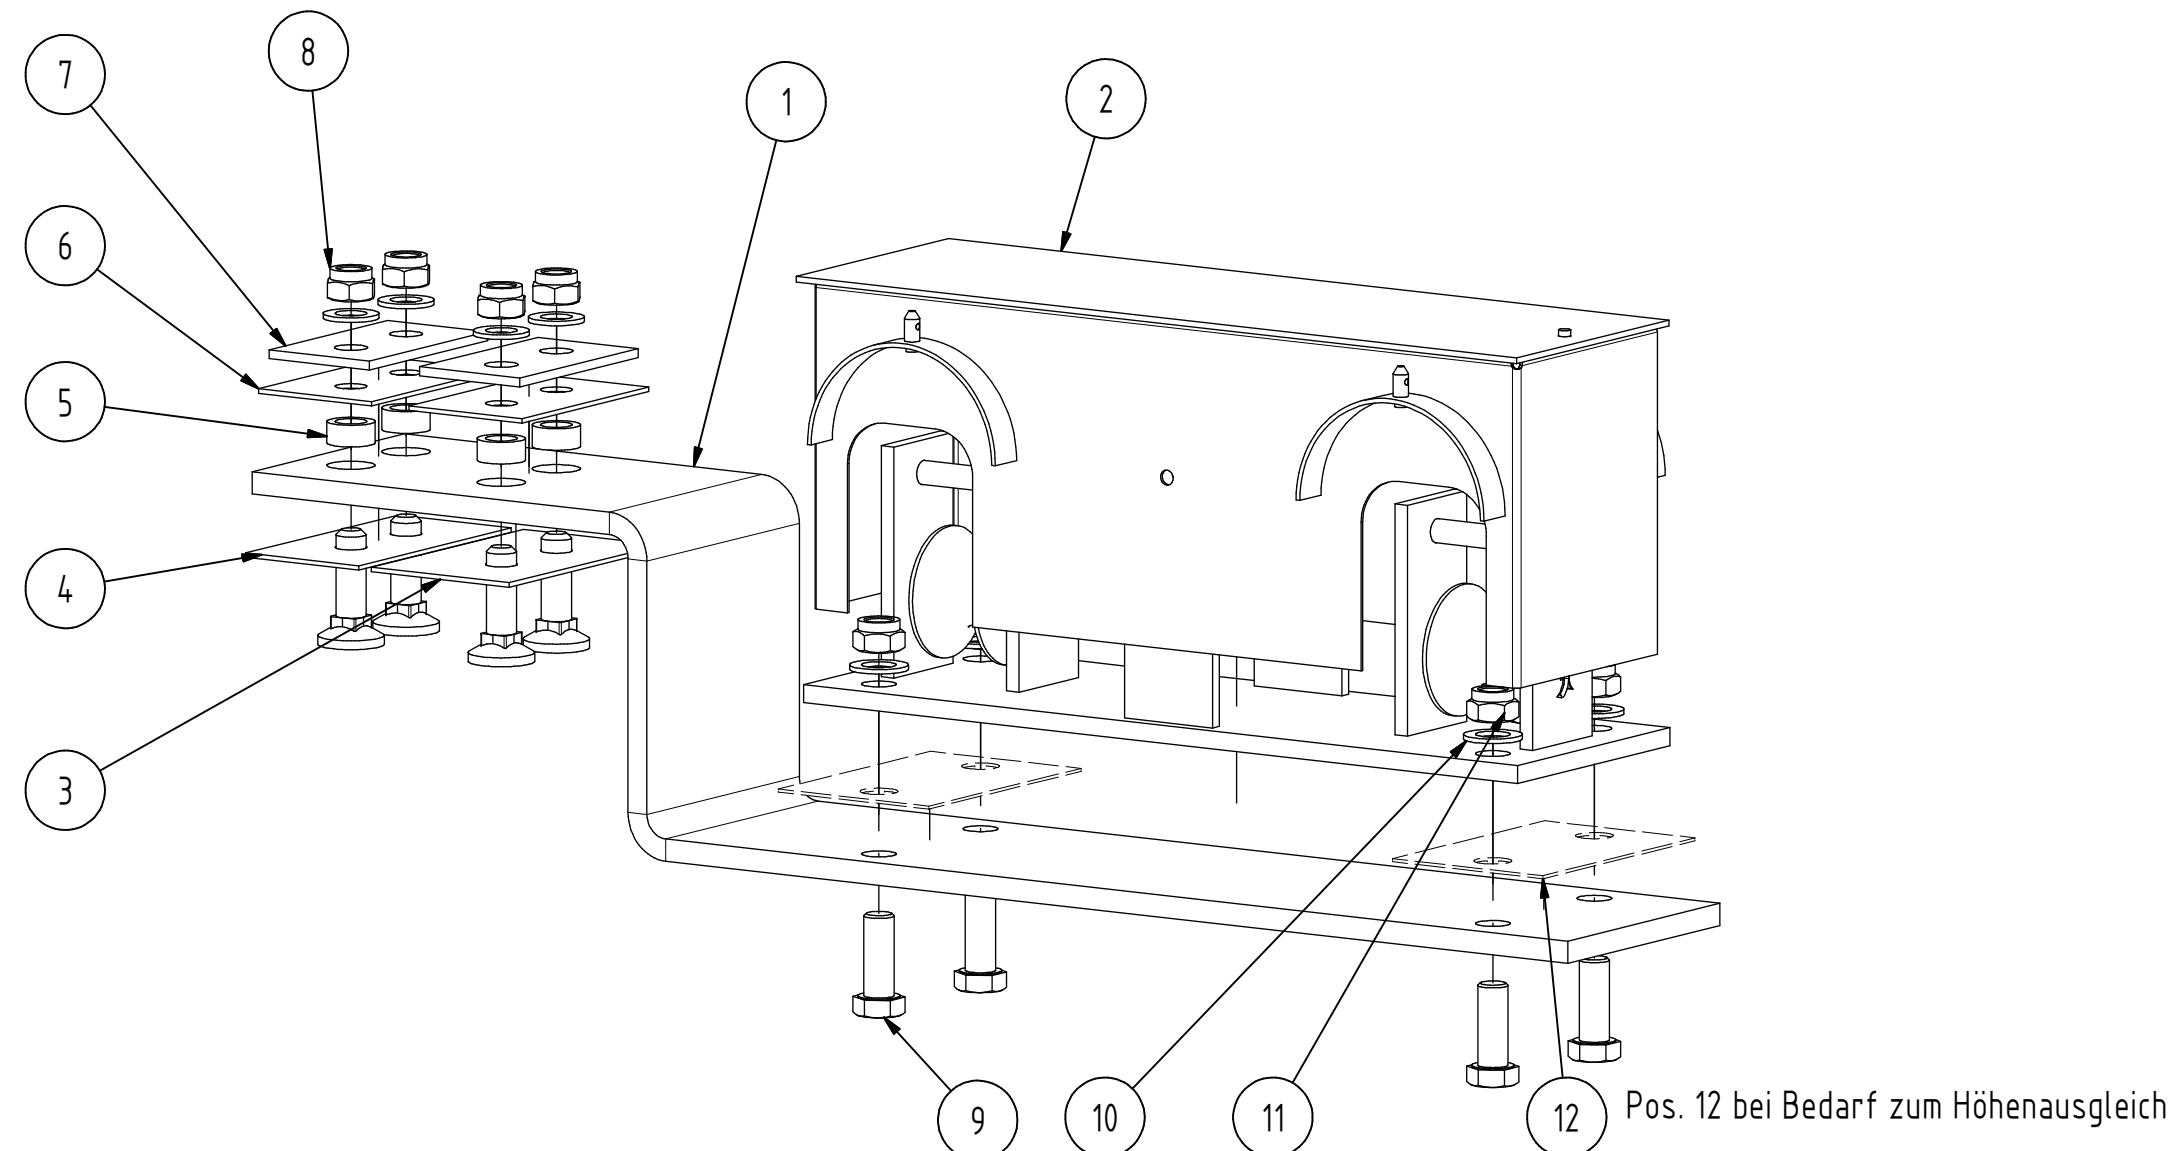

Schutzvermerk
DIN ISO 16016 beachten

Vervielfältigung und Verwertung nur für Zwecke der DB AG frei